



## WOXOL COMPRESSOR OIL 46

### FULLY SYNTHETIC MOTOR OIL

WOXOL Synthetic compressor oil is used for lubrication and cooling of air compressors; rotary screw compressors (ISO VG 32, 46, 68), piston compressors (ISO VG 100). Air outlet temperatures exceeding 90°C and/or air outlet temperatures exceeding 10 bar. It is recommended in cases where pressure is present.

#### Features

- Prevents carbon formation.
- Ensures rapid decomposition of oil by air and moisture condensation.
- Protects screws against wear and corrosion.
- Increases the efficiency of the compressor.

Extends the maintenance interval. Possible oil change interval:

- 4000 - 6000 hours in standard use of stationary compressors
- Up to 8000 hours, with regular oil analysis.
- It extends the service life of filter elements.

Thanks to WOXOL SYNTHETIC COMPRESSOR OIL anti-clogging feature, the filter has long-term (8000 up to hours) increases productivity.

#### Specifications and Approvals

ISO 6743 DAJ for heavy duty applications.

#### Technical Specifications

TEST	METHOD	TYPICAL VALUES
Kinematic Viscosity (40°C) [mm <sup>2</sup> /s = cSt]	ISO 3104	46
Viscosity Index	ISO 2909	139
Flash Point, °C	ISO 2592	262
Pour Point, °C	ISO 3016	-48

#### INFILUBE MADENİ YAĞ SANAYİ VE TİCARET A.Ş.

Telefon: +90 216 612 10 22

E-Posta: [info@woxollubricants.com](mailto:info@woxollubricants.com) / [woxollubricants.com](http://woxollubricants.com)

Adres: Cevizli Mah. Zuhâl Cad, 46 E Ritim İstanbul, A5 Blok Daire:25,  
Maltepe 34846 İstanbul / Türkiye


**INFILUBE**<sup>®</sup>  
MOTOR OIL AND LUBRICANTS

### Storage Conditions

It should be protected from direct sunlight and precipitation. Packages should be stored tightly closed, under a canopy or in a closed area. Storage temperature should be between (+5)- (+40)°C.

### Health and Safety Information

Based on current information, this product is not expected to have any adverse effects on human health when used in its intended location and under the specified conditions of use. Used product should not be burned, poured into soil or wastewater channels. Waste oils should be disposed of by licensed facilities with the characteristics defined in the Waste Oil Control Regulation, by separating them into categories as defined in this regulation. Please read the Material Safety Data Sheet when necessary.

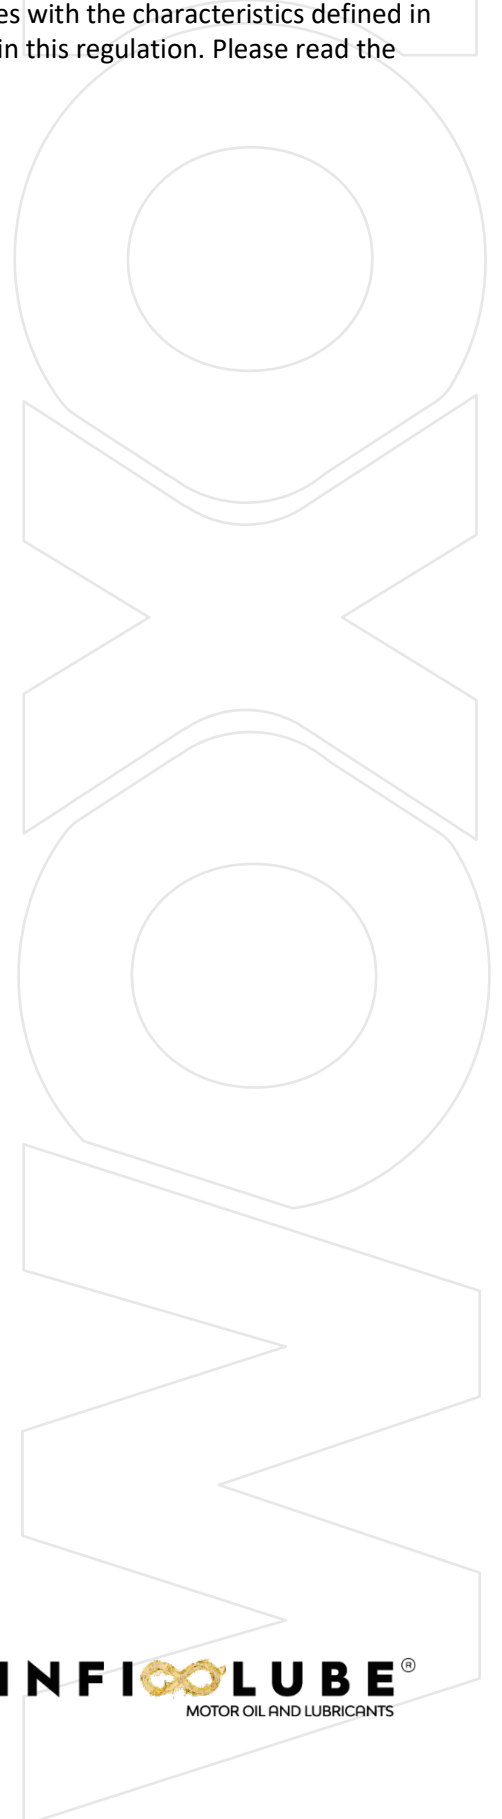

**INFILUBE MADENİ YAĞ SANAYİ VE TİCARET A.Ş.**

Telefon: +90 216 612 10 22

E-Posta: [info@woxollubricants.com](mailto:info@woxollubricants.com) / [woxollubricants.com](http://woxollubricants.com)

Adres: Cevizli Mah. Zuhâl Cad, 46 E Ritim İstanbul, A5 Blok Daire:25,  
Maltepe 34846 İstanbul / Türkiye

**INFILUBE®**  
MOTOR OIL AND LUBRICANTS